


GEMC-BSLC-4PT WIRING DIAGRAM

CURRENT = 4mA
VOLTAGE =
18VDC NOMINAL

REFER TO W11720
FOR ADDITIONAL
INFORMATION


BUS WIRES
NOT POLORIZED

GEMC-BSLC
2 WIRE BUS
(CLASS B WIRING)

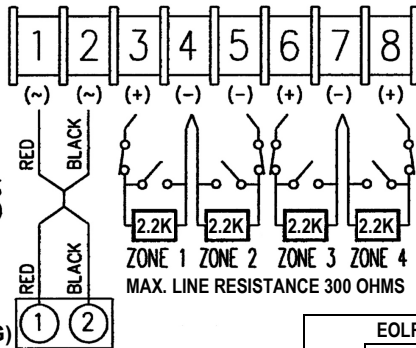

ZONE 1 ZONE 2 ZONE 3 ZONE 4
MAX. LINE RESISTANCE 300 OHMS

EOLR 2.2K



WIRE RANGE 12-22 AWG
MAX. 2 WIRES PER TERMINAL

 NAPCO SECURITY TECHNOLOGIES, INC.
AMITYVILLE, NY 11701

LA2890


GEMC-BSLC-4PT WIRING DIAGRAM

CURRENT = 4mA
VOLTAGE =
18VDC NOMINAL

REFER TO W11720
FOR ADDITIONAL
INFORMATION


BUS WIRES
NOT POLORIZED

GEMC-BSLC
2 WIRE BUS
(CLASS B WIRING)

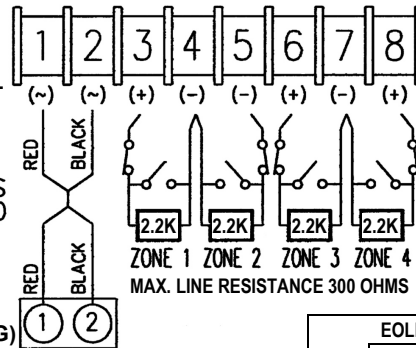

ZONE 1 ZONE 2 ZONE 3 ZONE 4
MAX. LINE RESISTANCE 300 OHMS

EOLR 2.2K



WIRE RANGE 12-22 AWG
MAX. 2 WIRES PER TERMINAL

 NAPCO SECURITY TECHNOLOGIES, INC.
AMITYVILLE, NY 11701

LA2890


GEMC-BSLC-4PT WIRING DIAGRAM

CURRENT = 4mA
VOLTAGE =
18VDC NOMINAL

REFER TO W11720
FOR ADDITIONAL
INFORMATION


BUS WIRES
NOT POLORIZED

GEMC-BSLC
2 WIRE BUS
(CLASS B WIRING)

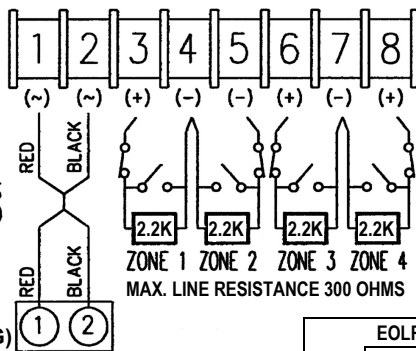

ZONE 1 ZONE 2 ZONE 3 ZONE 4
MAX. LINE RESISTANCE 300 OHMS

EOLR 2.2K



WIRE RANGE 12-22 AWG
MAX. 2 WIRES PER TERMINAL

 NAPCO SECURITY TECHNOLOGIES, INC.
AMITYVILLE, NY 11701

LA2890


GEMC-BSLC-4PT WIRING DIAGRAM

CURRENT = 4mA
VOLTAGE =
18VDC NOMINAL

REFER TO W11720
FOR ADDITIONAL
INFORMATION


BUS WIRES
NOT POLORIZED

GEMC-BSLC
2 WIRE BUS
(CLASS B WIRING)

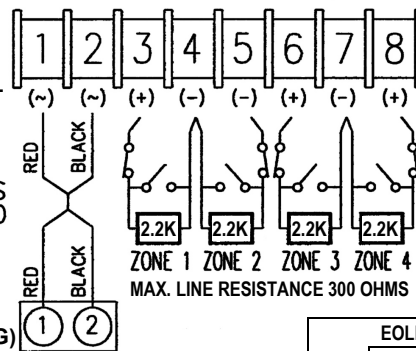

ZONE 1 ZONE 2 ZONE 3 ZONE 4
MAX. LINE RESISTANCE 300 OHMS

EOLR 2.2K



WIRE RANGE 12-22 AWG
MAX. 2 WIRES PER TERMINAL

 NAPCO SECURITY TECHNOLOGIES, INC.
AMITYVILLE, NY 11701

LA2890