



333 Bayview Avenue
Amityville, New York 11701
For Sales and Repairs, (800) 645-9445
For Technical Service, (800) 645-9440

Publicly traded on NASDAQ Symbol: NSSC


GEMC-PS24V4A-R 4 AMP SUPERVISED POWER SUPPLY / CHARGER DATA SHEET

© NAPCO 2010

WI1893 09/10

DESCRIPTION

The GEMC-PS24V4A-R is both a charger and a supervised power supply rated at 24VDC/4A. Input rating is 120VAC, 60Hz, 3A. Fuse rated 5A, 250V. Replace only with UL Listed fuse rated 5A, 250V (see WI1653).

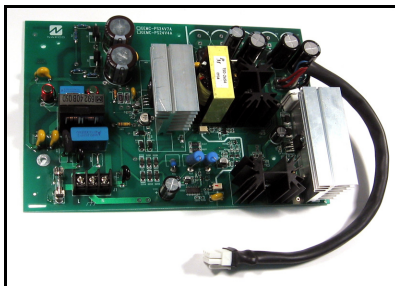

FEATURES

- 24VDC output.
 - Maximum charge current 1.96A.
 - 4 ampere continuous supply current at 24VDC.
 - Built-in charger for sealed lead acid or gel type batteries.
 - Automatic switch over to stand-by battery when AC fails.
 - AC input, DC output.
 - Short circuit and thermal overload protection.
- Specified at 25° C ambient.

PHYSICAL

Board Dimensions: 9"(L) x 6"(W) x 1 $\frac{5}{8}$ "(H)

AGENCY LISTINGS

UL864 9th Edition: Commercial Fire
UL985 Household Fire Warning System Units
NFPA 72 National Fire Alarm Code
CSFM: California State Fire Marshall (Pending)
FM Approval: (Pending)
NYCFD: NYC Fire Department (Pending)

ORDERING INFORMATION

GEMC-PS24V4A-R: 4A, 24V Power Supply